



FOCUS ON PIPE FITTINGS AND VALVES FOR OVER 20 YEARS,PROFESSIONAL MANUFACTURER

Company Profile

Wenzhou Huiyi Valve and Fittings Co.,Ltd is a manufacturer and exporter in Wenzhou City,Zhejiang Province,China.We mainly supply tube fittings and valves,and we have been in this field for over 20 years,now there are 85 workers in our company,there are 5 engineers which have rich experience and been in this field for many years,we have our own development team and research team,most of our products are designed by ourselves,and some of them are designed as per customers' requirements.Our products have been exported to many countries.

Main products:

Tube fittings:compression tube fittings(double ferrules tube fittings),hydraulic connector,pneumatic connector,forging steel high pressure pipe fittings,casting steel screwed pipe fittings,butt weld pipe fittings.All the tube fittings can be made of different materials and as per ANSI,ASME,DIN,GB etc.

Valves:needle valve,ball valve,gate valve,check valve,globe valve,gauge valve,instrumentation valve,butterfly valve, valve manifold.The size is from DN6 to DN1200,the working pressure is 0-10000PSI,the working temperature is -180 degree to 580 degree,our valves could be made of stainless steel,carbon steel,brass,cast iron,alloy,duplex stainless steel,monel.The packing material are PTFE,graphite,NBR,EPDM,Viton,which can meet different customers' requirements.

If you are interested in our products,please feel free to contact us,we are looking forward to establishing a long term business relationship with you for our mutual benefits.

Company Images Office



Workshop



Warehouse





PIECE BALL VALVE





PIECE BALL VALVE



Features:

Material: stainless steel(SS304,SS316,SS201),carbon steel(WCB)

Size:1/4" to 4"(DN8 to DN100)

Working Pressure: 200WOG,600WOG,1000WOG

Packing:PTFE,PEEK,VITON

Working Temperature: -20 degree C to 580 degree C

Structure: full port,reduce port,T port,L port

Connection Type:thread,butt weld,socket weld,quick assemble

Thread: NPT,BSPT,BSPP(G),ZG,R,Rc

Any other technical questions please contact Huiyi Company technical department.



NEEDLE VALVE



flange needle valve
Model No.:J41F-1



female thread needle valve with T handle
Model No.:HY-FTNV



female thread needle valve with vent
Model No.: HY-FTNV-V



power station globe valve
Model No.:HY-PSGV



angle type weld needle valve
Model No.:HY-ANVBW



weld needle valve with hand wheel
Model No.:HY-BWNV1



angle type male thread needle valve
Model No.:HY-ANVMT



ferrule type needle valve
Model No.:HY-FNV2



ferrule type needle valve
Model No.:HY-FNV



ferrule type needle valve, T handle
Model No.: HY-FNV1



hex body M x F thread needle valve
Model No.: HY-HMFNV



hex body M x F thread needle valve with vent
Model No.:HY-HMFNV-V



female thread needle valve with hand wheel
Model No.:HY-FTNV2



M x F thread needle valve
Model No.:HY-MFNV



3 way pressure gauge globe valve
Model No.:HY-3WGV



female thread needle valve
Model No.:HY-FTNV4



NEEDLE VALVE



Features:

Material: stainless steel(SS304,SS316,SS201),carbon steel(A105)

Size:1/8" to 2"(DN6 to DN50)

Working Pressure:1000PSI(68.9 bar),3000PSI(206.7 bar)

6000PSI(413.4 bar),10000PSI(689 bar)

Working Temperature: -20 degree C to 580 degree C

Packing:PTFE,PEEK,VITON

Connection Type:thread,butt weld,socket weld,flange

Thread: NPT,BSPT,BSPP(G),ZG,R,Rc

Any other technical questions please contact Huiyi Company technical department.



PNEUMATIC BALL VALVE



Features:

Material: stainless steel(SS304,SS316)

Size:1/8" to 2"(DN6 to DN50)

Working Pressure:1000PSI(68.9 bar),3000PSI(206.7 bar),6000PSI(413.4 bar)

Working Temperature: -20 degree C to 580 degree C

Packing:PTFE,PEEK,VITON


Connection Type:thread,ferrules

Thread: NPT,BSPT,BSPP(G),ZG,R,Rc

Any other technical questions please contact Huiyi Company technical department.



HYDRAULIC BALL VALVE

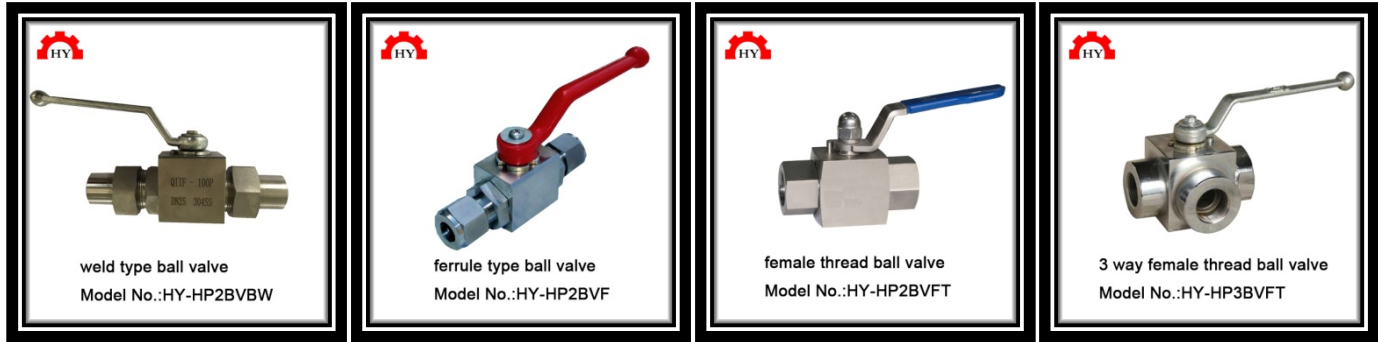

Features:

Material: stainless steel(SS304,SS316),carbon steel(A105,20#)

Size:1/4" to 2"(DN8 to DN50)

Working Pressure:1000PSI(68.9 bar),3000PSI(206.7 bar)

6000PSI(413.4 bar),1000PSI(689 bar)

Working Temperature: -20 degree C to 580 degree C

Packing:PTFE,PEEK,VITON

Connection Type:thread,ferrules,weld

Thread: NPT,BSPT,BSPP(G),ZG,R,Rc

Any other technical questions please contact Huiyi Company technical department.



GLOBE VALVE



Features:

Material: stainless steel(SS304,SS316),carbon steel(A105,20#,WCB)

Size:1/4" to 4"(DN8 to DN100)

Working Pressure:150LB,300LB,600LB,900LB,1500LB,2500LB,3000LB

Working Temperature: -20 degree C to 580 degree C

Packing:PTFE,PEEK,VITON,metal


Connection Type:thread,butt weld,socket weld,flange

Thread: NPT,BSPT,BSPP(G),ZG,R,Rc

Any other technical questions please contact Huiyi Company technical department.



GATE VALVE

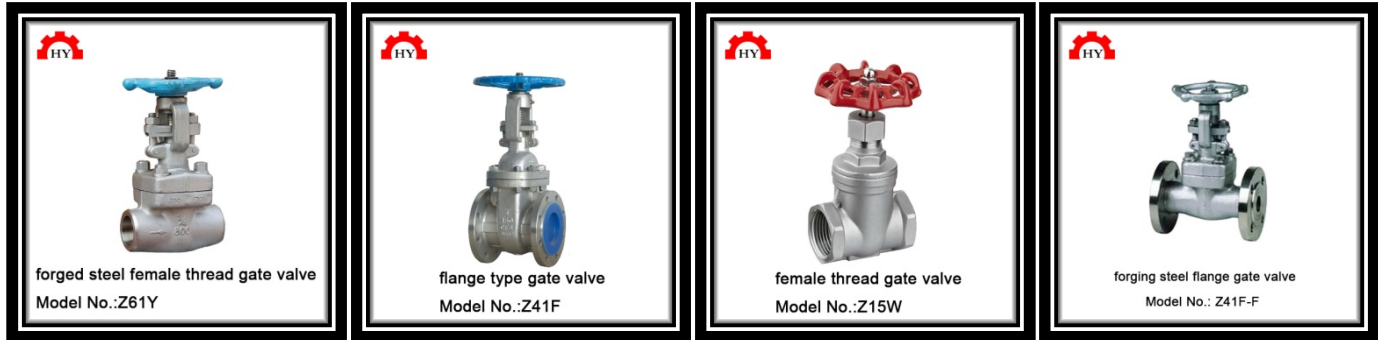

Features:

Material: stainless steel(SS304,SS316),carbon steel(A105,20#,WCB)

Size:1/4" to 4"(DN8 to DN100)

Working Pressure:150LB,300LB,600LB,900LB,1500LB,2500LB,3000LB

Working Temperature: -20 degree C to 580 degree C

Packing:PTFE,PEEK,VITON,metal


Connection Type:thread,butt weld,socket weld,flange

Thread: NPT,BSPT,BSPP(G),ZG,R,Rc

Any other technical questions please contact Huiyi Company technical department.



CHECK VALVE



Features:

Material: stainless steel(SS304,SS316),carbon steel(A105,20#,WCB)

Size:1/4" to 4"(DN8 to DN100)

Working Pressure:150LB,300LB,600LB,900LB,1500LB,2500LB,3000LB

Working Temperature: -20 degree C to 580 degree C

Packing:PTFE,PEEK,VITON,metal

Connection Type:thread,butt weld,socket weld,flange

Thread: NPT,BSPT,BSPP(G),ZG,R,Rc

Any other technical questions please contact Huiyi Company technical department



FLANGE BALL VALVE



Features:

Material: stainless steel(SS304,SS316),carbon steel(A105,20#,WCB)

Size:1/2" to 12"(DN15 to DN300)

Working Pressure:150LB,300LB,600LB,900LB,1500LB,2500LB,3000LB

Working Temperature: -20 degree C to 580 degree C

Packing:PTFE,PEEK,VITON,metal

Connection Type:flange

Manufacturing Standard: ANSI,ASME,DIN,JIS,GB,Europe standard

Any other technical questions please contact Huiyi Company technical department.



FORGING STEEL HIGH PRESSURE PIPE FITTINGS



45 degree socket weld elbow
Model No.:HY-SWE45



45 degree female thread elbow
Model No.:HY-FTE45



90 degree socket weld elbow
Model No.:HY-SWE90



90 degree female thread elbow
Model No.:HY-FTE90



male x female thread elbow
Model No.:HY-MFE90-1



male thread elbow
Model No.:HY-MTE90-1



socket weld coupling
Model No.:HY-SWC



socket weld union
Model No.:HY-SWU



socket weld tee
Model No.:HY-SWT




socket weld cross
Model No.:HY-SWC-1



socket weld weldolet
Model No.:HY-SWWO




pipe nipple
Model No.:HY-PN



hex bushing
Model No.:HY-HB



hex plug
Model No.:HY-HP



hex female thread coupling
Model No.:HY-HFTC



hex nipple
Model No.:HY-HFTC




FORGING STEEL HIGH PRESSURE PIPE FITTINGS




threadolet
Model No.:HY-TO



female thread coupling
Model No.:HY-FTC



female thread union
Model No.:HY-FTU



female thread hex socket
Model No.:HY-FTHS



female thread tee
Model No.:HY-FTT-1



female thread tee
Model No.:HY-FTT



female thread cross
Model No.:HY-FTCR



female thread elbow
Model No.:HY-FTE-1



male x female thread union
Model No.:HY-MFTU



male x female thread tee
Model No.:HY-MFTT



male x female thread adapter
Model No.:HY-MFTA



male thread tee
Model No.:HY-MTT-1




reducing pipe nipple
Model No.:HY-RPN



reducing female thread coupling
Model No.:HY-RFTC



round head plug
Model No.:HY-RP



round cap
Model No.:HY-RC



FORGING STEEL HIGH PRESSURE PIPE FITTINGS

Features:

Material: stainless steel(SS304,SS316,SS201),carbon steel(A105,20#)

Size:1/4" to 4"(DN8 to DN100)

Working Pressure:2000LB,3000LB,6000LB,9000LB

Working Temperature: -20 degree C to 580 degree C

Connection Type:thread,socket weld

Manufacturing Standard: ANSI,ASME,DIN,JIS,GB,Europe standard

Thread:NPT,BSPT,BSPP(G),ZG,Rc,R

Any other technical questions please contact Huiyi Company technical department.



DOUBLE FERRULES PIPE FITTINGS/COMPRESSION FITTINGS



bulkhead union
Model No.:HY-BU



plug
Model No.:HY-P



cap
Model No.:HY-C



weld straight connector
Model No.:HY-MWC



union tee
Model No.:HY-UT




union cross
Model No.:HY-UC



union elbow
Model No.:HY-UE



union
Model No.:HY-U



nut
Model No.:HY-N



female branch tee
Model No.:HY-FBT



female elbow
Model No.:HY-FE



female connector
Model No.:HY-FC



female thread hose connector
Model No.:HY-FHC



double ferrules
Model No.:HY-DF



male run tee
Model No.:HY-MRT



male branch tee
Model No.:HY-MBT



DOUBLE FERRULES PIPE FITTINGS/COMPRESSION FITTINGS



Features:

Material: stainless steel(SS304,SS316,SS201),brass

Size:1/8" to 1"(DN6 to DN25)

Working Pressure:1000PSI,3000PSI,6000PSI,10000PSI

Working Temperature: -20 degree C to 580 degree C

Connection Type:double ferrules,single ferrule,thread

Thread:NPT,BSPT,BSPP(G),ZG,Rc,R

Any other technical questions please contact Huiyi Company technical department.



CASTING STEEL SCREWED PIPE FITTINGS





DOUBLE FERRULES PIPE FITTINGS/COMPRESSION FITTINGS



Features:

Material: stainless steel(SS304,SS316,SS201)

Size:1/8" to 4"(DN6 to DN100)

Working Pressure:150 LB

Working Temperature: -20 degree C to 580 degree C

Connection Type:thread

Thread:NPT,BSPT,BSPP(G),ZG,Rc,R

Any other technical questions please contact Huiyi Company technical department.



BUTT WELD PIPE FITTINGS



Features:

Material: stainless steel(SS304,SS316,SS304L,SS316L)

Size:1/4" to 40"(DN8 to DN1000)

Wall Thickness:sch5 - sch xxs

Working Temperature: -20 degree C to 580 degree C

Connection Type:butt weld

Pipe Type: seamless,welded

Any other technical questions please contact Huiyi Company technical department.



SANITARY PIPE FITTINGS



Features:

Material: stainless steel(SS304,SS316)

Size: 1/4" to 4"(DN8 to DN100)

Wall Thickness: sch5 – sch40

Working Temperature: -20 degree C to 580 degree C


Connection Type: weld, quick assembly

Pipe Type: seamless, welded

Any other technical questions please contact Huiyi Company technical department.



VALVE MANIFOLD

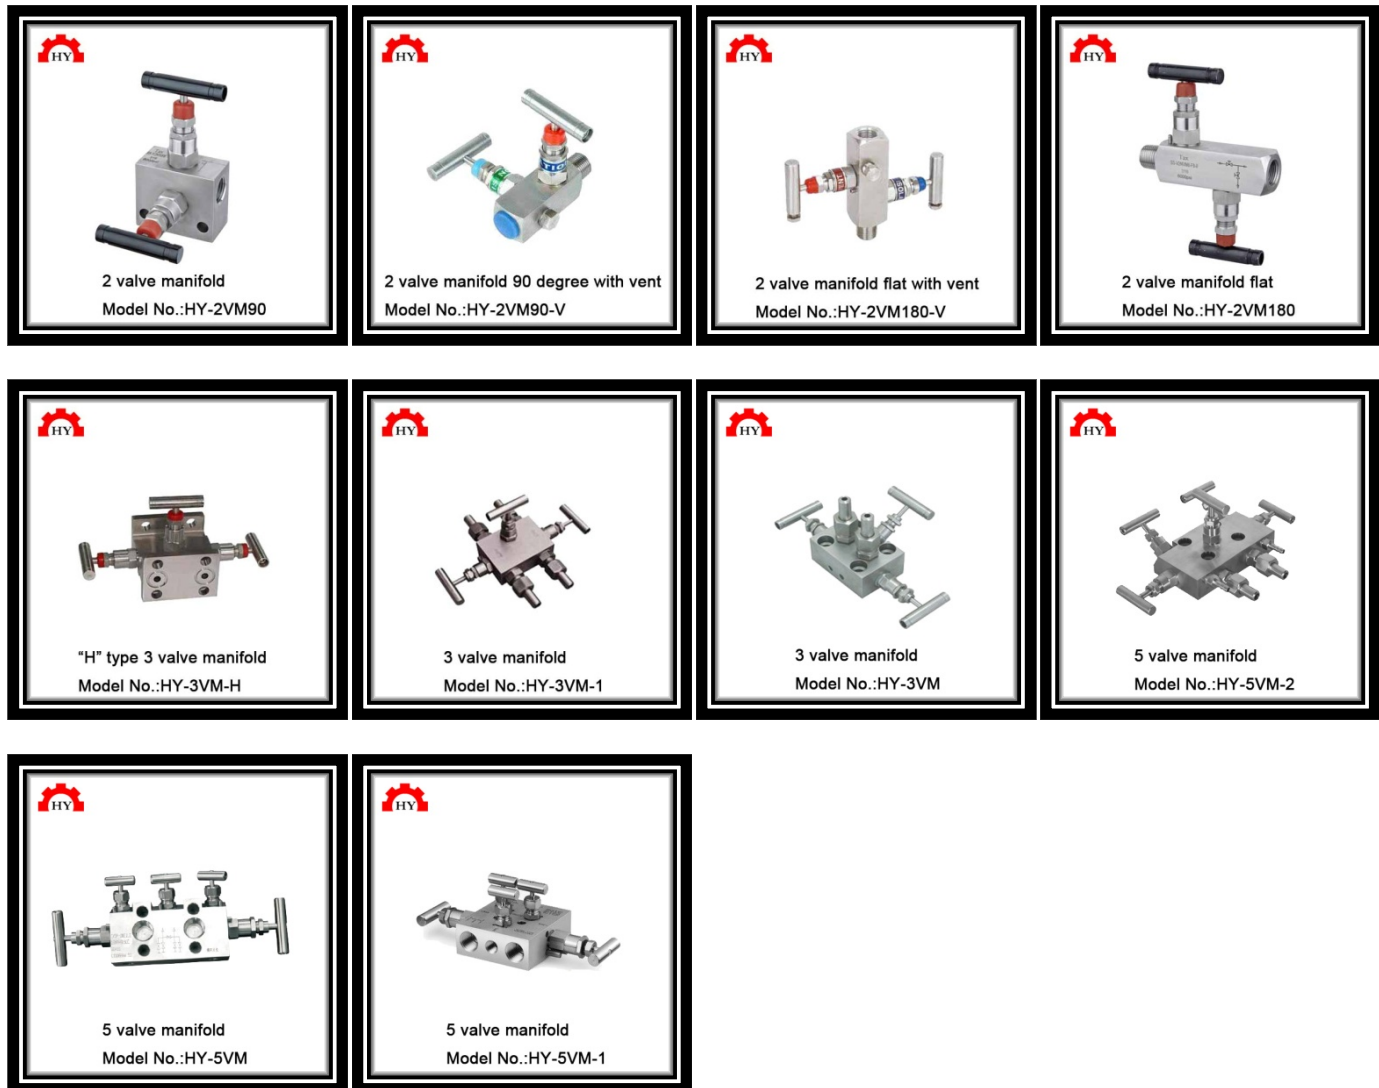

Features:

Material: stainless steel(SS304,SS316)

Size:1/4" to 4"(DN8 to DN100)

Wall Thickness:sch5 – sch40

Working Temperature: -20 degree C to 580 degree C

Connection Type:weld,quick assembly

Pipe Type: seamless,welded

Any other technical questions please contact Huiyi Company technical department.



BRASS VALVE



Features:

Material: brass,bronze

Size:1/2"-4"(DN15 – DN100)

Working Pressure:4 bar,6 bar,10 bar,16 bar

Working Temperature: -20 degree C to 150 degree C

Packing:PTFE,PEEK,VITON

Connection Type:female thread

Manufacturing Standard: ANSI,ASME,DIN,JIS,GB,Europe standard

Any other technical questions please contact Huiyi Company technical department.



Wenzhou Huiyi Valve and Fittings Co.,Ltd

Add:NO.2158,Binhai 1st Road,Economic and Technical Development Zone,Longwan District,Wenzhou City,Zhejiang Province,China

Tel:0086-577-86998027

Fax:0086-577-86998037

Mobile: 0086-18057736259 0086-15167401934

Email: sales@huiyivalve.com info@huiyivalve.com

Skype: huiyivalve

WhatsApp: +8618057736259 +8615167401934

Wechat: huiyivalve

Website: www.huiyivalves.com

www.huiyivalve.en.alibaba.com

Online Shop: <https://shop1477413771507.1688.com>